


Polarization Maintaining Optical Fiber (PMOFM Series)

Specifications

Parameter	Unit	Value
Center Wavelength (λ_c)	nm	1060
Operating Wavelength Range	nm	$\lambda_c \pm 20$
Typ. Insertion Loss	dB	0.4
Max. Insertion Loss	dB	0.6
Min. Extinction Ratio	dB	20
Fiber Type		PM Panda fiber or specify
Max. Optical Power (Continuous Wave)	mW	500
Max. Tensile Load	N	5
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

*IL is 0.5 dB higher, RL is 5 dB, and ER is 2 dB lower for each connector added. Connector key is aligned to slow axis,

Package Dimensions

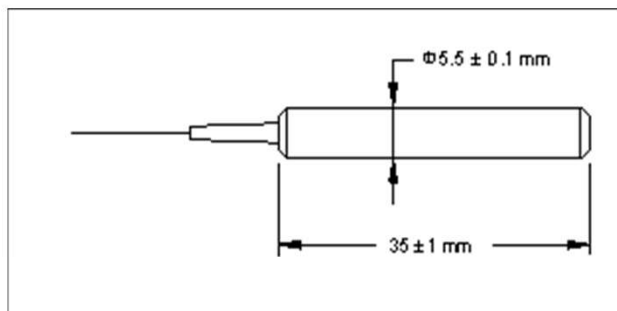

Ordering Information

PMOFM-①①②③④

①①: Wavelength

06 - 1060 nm

SS - Specify

②: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

③: Fiber Type

B - 250 μm Panda fiber

L - 900 μm loose tube

S - Specify

④: Fiber Length

Q - 0.75 m

S - Specify